

TRIPLEYE® HELIX-SHAFT ASSEMBLY

## Anchors No-Wrench

### NO-WRENCH CAM ACTION® SCREW ANCHORS

These anchors can be installed either manually or with power driven equipment. Manual installation is accomplished by inserting a bar through the eye and screwing the anchor down. Installation with portable or vehicle mounted installing equipment is accomplished by means of adapters. The eye dimensions are the same as shown on the Threaded Forged-Eye Anchor Rods.

### TRIPLEYE® HELIX-SHAFT ASSEMBLIES Hot Dip Galvanized

Catalog No.	Description	Approximate Weight (Lbs. Each)
J6524WCA	4" Helix, 3/4" x 54" Shaft	8.1
J6526WCA	6" Helix, 3/4" x 66" Shaft	10.9
J6528WCA	8" Helix, 1" x 66" Shaft	19.1
J6530WCA	10" Helix, 1-1/4" x 66" Shaft	30.3
J6550WCA	10" Helix 1-1/4" x 8' Shaft	41.1
J6585WCA	15" Helix, 1-1/4" x 8' Shaft	52.0



EXTENSION ASSEMBLY


## Anchors Extension for No-Wrench Anchors

### EXTENSION ASSEMBLIES

#### Hot Dip Galvanized

The J6566 Tripleye® extension assembly is used with 1-1/4-inch diameter Tripleye® forged eye shaft No-Wrench screw anchors when greater installing depths are required.

Catalog No.	Description	Approximate Weight (Lbs. Each)
J6566	1-1/4" x 6' Shaft	29.0

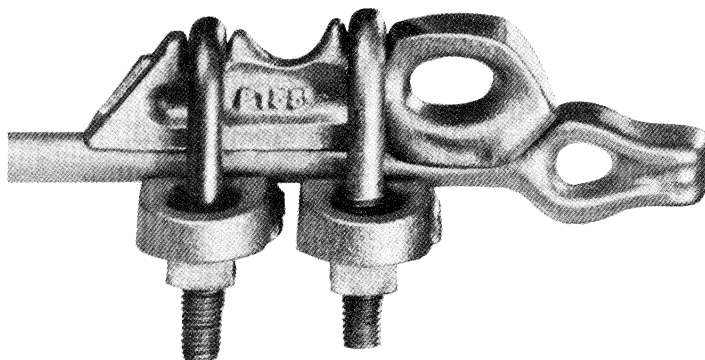

## Anchors Clamps, Auxiliary Anchor Rod Eye

### Hot Dip Galvanized

Auxiliary eye clamps permit an efficient method of adding an eye to an existing anchor rod for attaching an additional guy wire. The eye has a generous 1-1/2" thimble diameter.

Catalog No.	Anchor Rod Dia. Range	Maximum Strand Size	Approximate Weight (Lbs. Per 100 Pcs.)
PA155	5/8" - 3/4"	1/2"	270
PA155A	7/8" - 1"	1/2"	338