

### Anchors Clamps, Auxiliary Anchor Rod Eye

#### Hot Dip Galvanized

Auxiliary eye clamps permit an efficient method of adding an eye to an existing anchor rod for attaching an additional guy wire. The eye has a generous 1-1/2" thimble diameter.

Catalog No.	Anchor Rod Dia. Range	Maximum Strand Size	Approximate Weight (Lbs. Per 100 Pcs.)
PA155	5/8" – 3/4"	1/2"	270
PA155A	7/8" – 1"	1/2"	338

### Clamps, B-Strand, Ground

#### Hot Dip Galvanized

Joslyn J7956 Clamps are used to bond the cable sheath to the messenger strand. The clamp body is made of 1-1/2 x 3/16-inch steel with an inside keeper riding on the end of the bolt. The 1/2-inch bolt can be removed to place the clamp over the messenger wire.



Catalog No.	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J7956	52

### Brackets, Service Mast

#### Hot Dip Galvanized

The J0590 Service Mast Bracket is used with a service wedge clamp to attach the neutral wire of drop cable to the service mast. The front strap is rounded to prevent damaging the bail of the service wedge clamp.

This bracket clamps to 1-1/4-inch to 3-inch pipe. A specially designed slot on the end of the front strap permits installation of the bracket without removing the bolts, then captures the square carriage bolt shoulder to prevent it from turning or slipping out after installation.



Catalog No.	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J0590	105


### Clamps, Cable Suspension, Angle

#### Hot Dip Galvanized


Angle Suspension Clamps have curved ends to prevent damage to the messenger strand when turning small angles. All clamps firmly grip 1/4 to 7/16-inch diameter strand. They are furnished with two track bolts and a center mounting hole.



Catalog No.	Clamp Width (Inches)	Clamp Length (Inches)	Clamp Bolt Diameter (Inches)	Mounting Hole Diameter (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J7901	1-11/16	5-3/4	1/2	13/16	208
J7901A	1-11/16	5-3/4	1/2	11/16	210
J7902B	2-3/16	6	5/8	13/16	385

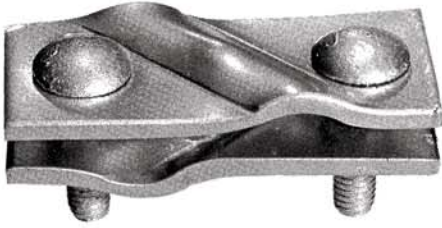

J25564

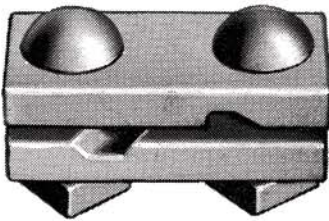

J7930

### Clamps, Crossover

#### Hot Dip Galvanized

#### Joslyn Crossover Clamps For CATV or Telephone Cables

Joslyn's Crossover Clamps are used to clamp two messengers where they cross at right angles.

The J7930 Drop Forged Clamp sections are 1-1/2-inch wide and 3-1/4-inch long. Two 1/2-inch diameter bolts have oval shoulders to prevent turning when tightening.

The J25564 Clamps are 1-1/2-inch wide and 3-1/2-inch long. Two 3/8-inch diameter carriage bolts and nuts are installed in the square holes of the clamp providing a "locking action". Unique cable grooves with a center "dimple" provide superior clamping action.

Catalog No.	For Strand Diameter (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J7930	1/4 to 3/8	154
J25564	3/16 to 1/2	71



ONE-BOLT



THREE-BOLT

### Clamps, Cable Suspension

#### Hot Dip Galvanized

Joslyn Cable Suspension Clamps are used with through bolts, which serve as a clamping member, and are shaped to securely grip messenger wire to the pole. A nut and square washer is used between the clamp and the pole to provide proper spacing.

The J1095 is used for light cables and consists of the clamping members only. A 5/8" through bolt tightens the clamp on the wire as well as to the pole.

The J1096 and J25088.1 three-bolt clamps are used for heavier cables and are furnished with a 5/8" through bolt hole. The J25088.1 keeper plate is flat.

Catalog No.	No. of Bolts	Clamp Bolt Diameter (Inches)	Clamp Length (Inches)	Mounting Hole Diameter (Inches)	Strand Diameter (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J1095	1	—	2-1/2	11/16	1/4 to 7/16	67
J1096	3	1/2	5-3/4	11/16 x 15/16	1/4 to 7/16	180
J25088.1	3	1/2	5-3/4	11/16 x 15/16	1/4 to 7/16	175