


Anchors Rods, Threaded, Forged-Eye

Hot Dip Galvanized

Joslyn forged Thimbleye®, Twineye® and Tripleye® anchor rods are used for guying with expanding and cross plate as well as “Deadman” log anchor assemblies. All rods are threaded 3-1/2-inches and are assembled with a heavy square nut.

Rod Diameter (Inches)	Minimum Ultimate Strength Rating (Pounds)	Length (Feet)	Thimbleye®		Twineye®		Tripleye®	
			Catalog No.	Approx. Weight (Lbs. Each)	Catalog No.	Approx. Weight (Lbs. Each)	Catalog No.	Approx. Weight (Lbs. Each)
5/8	16,000	5	J7415	5.4				
		6	J7416	6.4	J7516	6.5		
		7	J7417	7.5	J7517	8.0		
		8	J7418	8.0	J7518	8.4		
3/4	23,000	7	J7427	11.0	J7527	11.0	J7327	11.2
		8	J7428	12.5	J7528	12.4	J7328	12.5
		9	J7429	14.0	J7529	14.0	J7329	14.3
		10	J7430	15.0	J7530	15.7		
1	36,000	8			J7538	22.9	J7338	22.0
		10			J7540	28.4	J7340	27.0
1-1/4	58,000	10					J7350	44.0

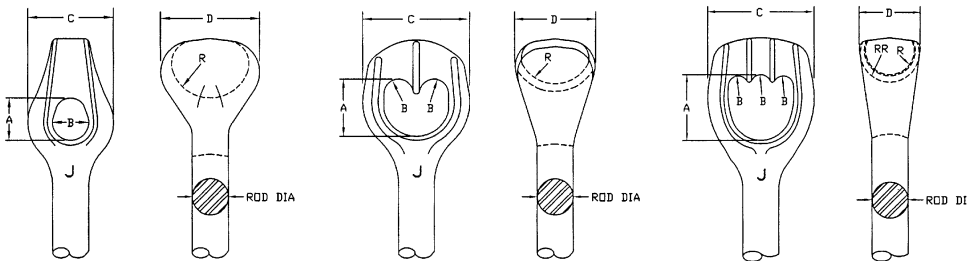

Anchors Rods, Threaded, Forged Eye

Hot Dip Galvanized

EYE DIMENSIONS

Rod Diameter (Inches)	Thimbleye®					Twineye®					Tripleye®					
	Dimensions (Inches)					Dimensions (Inches)					Dimensions (Inches)					
	A	B	C	D	R	A	B	C	D	R	A	B	C	D	R	RR
5/8	11/16	9/16	1-1/2	1-11/16	11/16	15/16	1/4	1-13/16	1-23/64	11/16						
3/4	13/16	11/16	1-5/8	1-7/8	3/4	1	1/4	1-31/32	1-5/8	11/16	1-9/16	1/4	2-5/8	1-7/16	19/32	5/8
1						1-1/4	5/16	2-3/8	1-3/4	11/16	1-9/16	1/4	2-23/32	1-5/8	11/16	21/32
1-1/4											1-9/16	1/4	2-15/16	1-7/8	27/32	15/16