
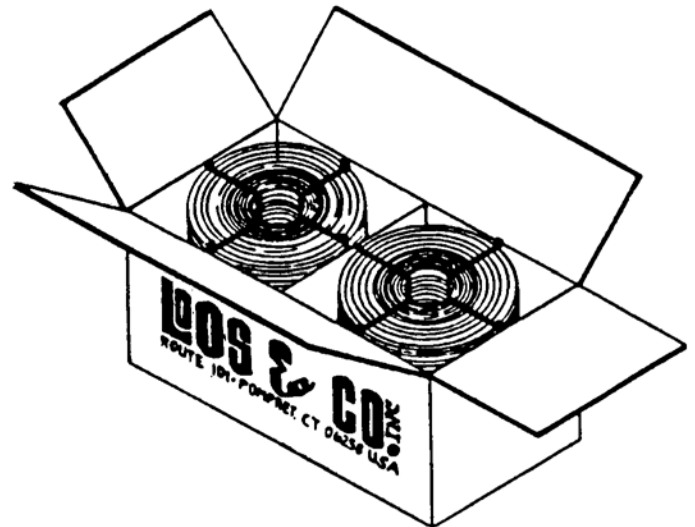


SPECIFICATIONS							
LOOS PART #	TYPE	WIRE DIAMETER	NOMINAL COIL SIZE		AVERAGE BREAK STRENGTH	# COILS /BOX	APPROX. SHIP WT. /BOX
			LBS.	FEET†			
038SA302LAC*	302 S.S.	.038"	6.29	1,600'	115 Lbs.	6	37 LBS
038SA316LAC*	316 S.S.	.038"	6.29	1,600'	115 Lbs.	6	37 LBS.
045SA430LAC*	430 S.S.	.045"	6.62	1,200'	125 Lbs.	6	40 LBS.
045SA302LAC*	302 S.S.	.045"	6.62	1,200'	165 Lbs.	6	40 LBS.
045SA316LAC*	316 S.S.	.045"	6.62	1,200'	165 Lbs.	6	40 LBS.
065SA430LAC*	430 S.S.	.065"	5.28	450'	245 Lbs.	6	32 LBS.
065SA430LA6*	430 S.S.	.065"	7.62	650'	245 Lbs.	6	46 LBS.
065SA302LAC*	302 S.S.	.065"	5.28	450'	300 Lbs.	6	32 LBS.
0450SA430LA2*	430 S.S.	.045"	12.13	2,200'	125 Lbs.	3	37 LBS.

\* Denotes Stock Items

† Nominal footage of coils may vary by 30 ft.

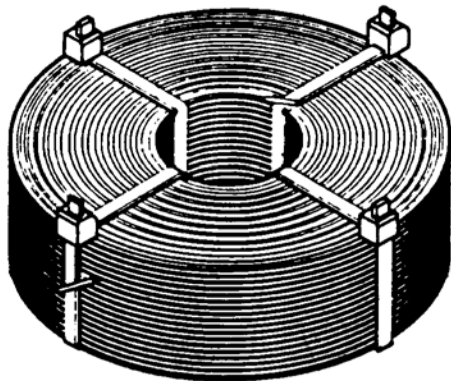

**For Stainless Service  
Call 1-800-533-LOOS (5667)**

AS9100 – Revision B and ISO 9001:2000